

02/2014


**Mod: DFV-411/S**

**Production code: SDA-104E**



**Diamond**  
catering equipment

4 x 2/3 GN / 4 - 7 x 1/1 GN ANALOGIC

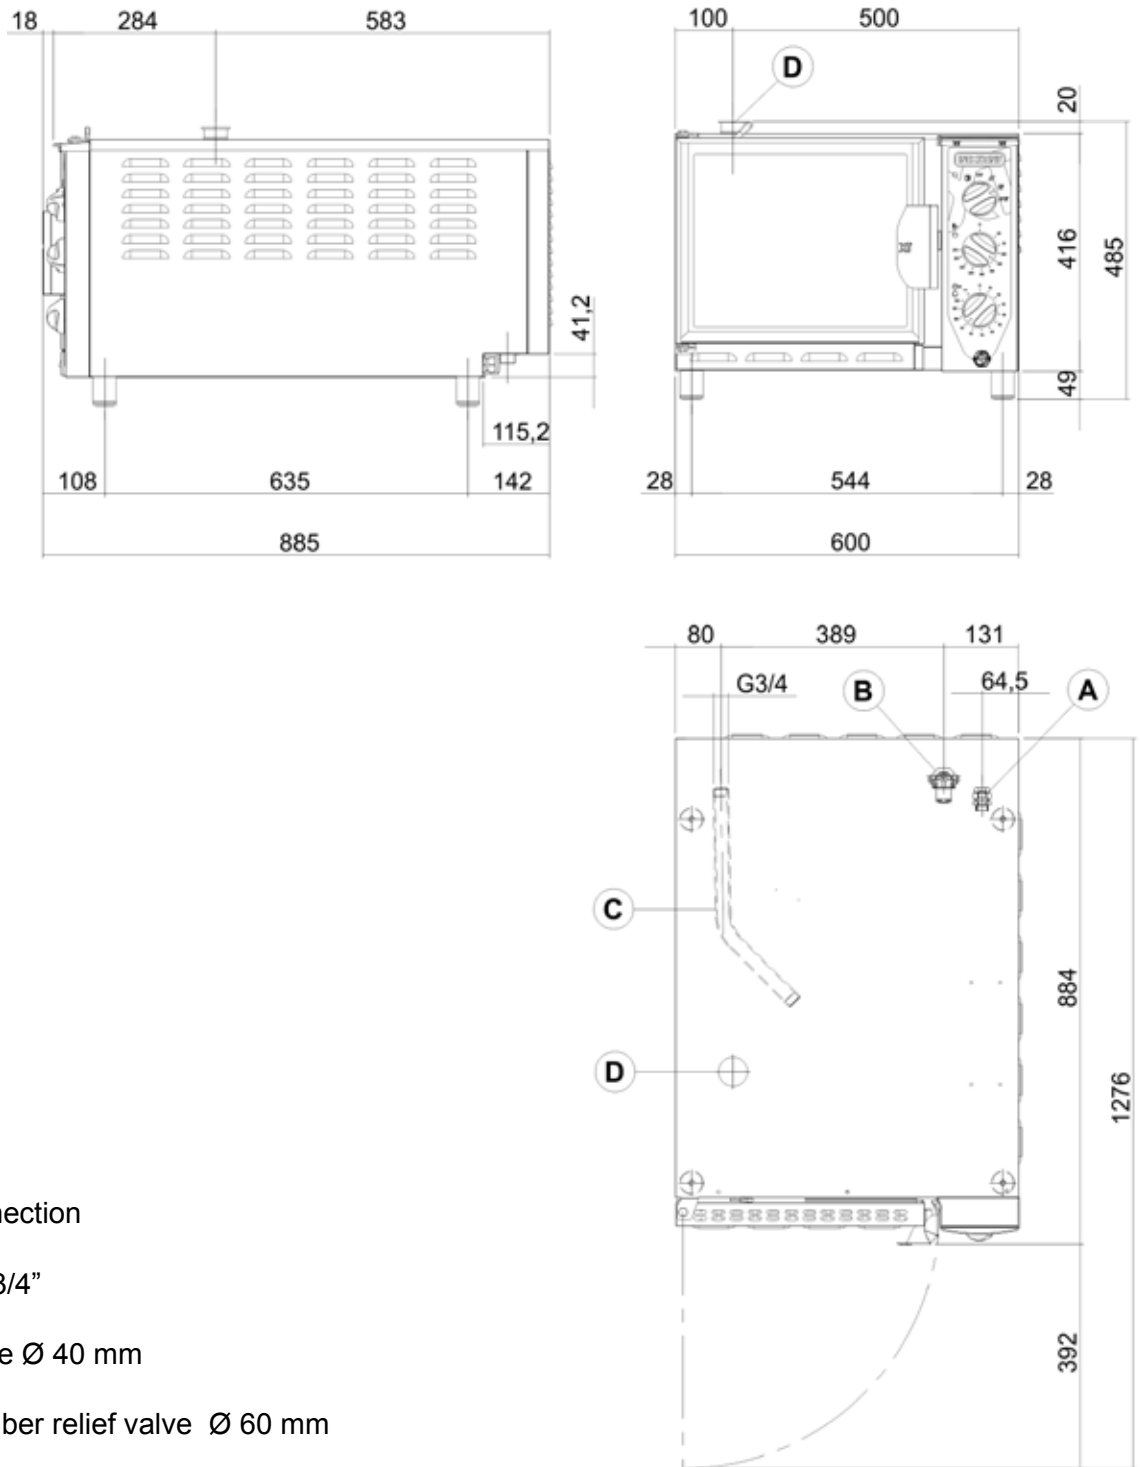

A- Electrical connection

B- Water inlet Ø 3/4"


C- Water drainage Ø 40 mm

D- Cooking chamber relief valve Ø 60 mm

4 x 1/1 GN

0.1B Dimensions mod. 4 x 1/1 GN			
Model	Dimensions	Capacity	Trays distance
4 x 1/1 GN Electric	cm 60 x 88 x h 48	4 x 1/1 GN 8 x 1/2 GN	67 mm

4 x 2/3 GN / 4 - 7 x 1/1 GN ANALOGIC

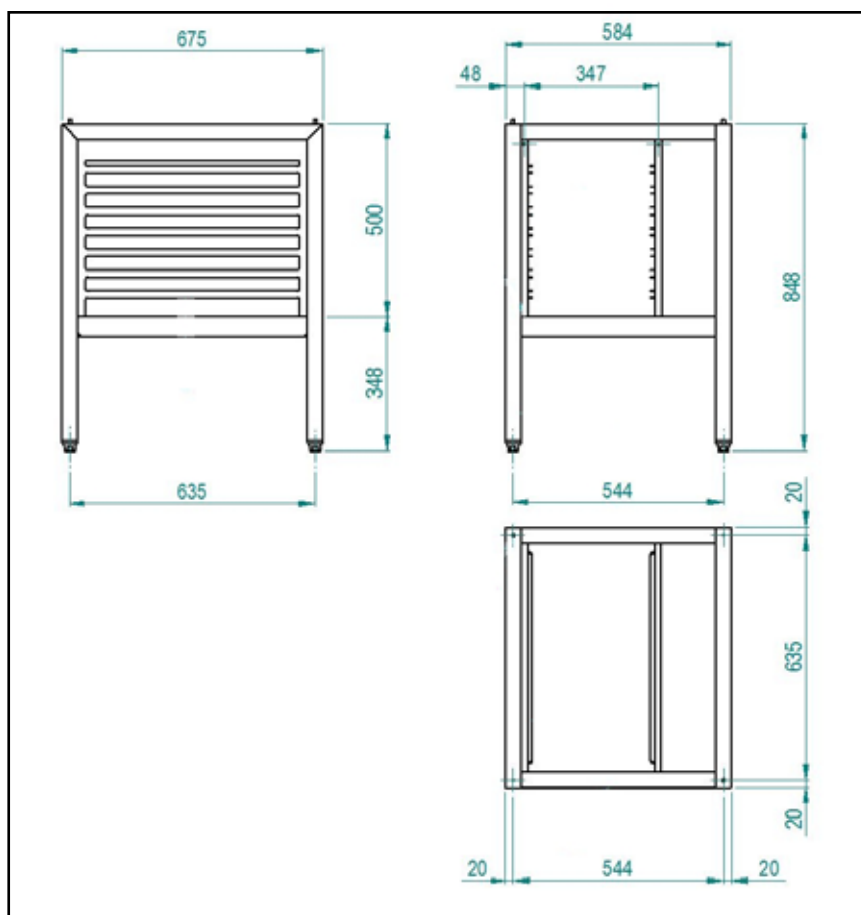

Stand with tray-slides  
for mod. 0.1B (4 x 1/1 GN)

1.6 TECHNICAL DATA FOR ELECTRICAL CONNECTION

Model	Power loading and voltage	no. and motor power	Heating power	Absorbed current	Feed cable section
4 x 2/3 GN	3.0 kW 230V+ 1 ~ 50/60 Hz	1 x 250 W	2.6 kW	5.0 A	3 x 1.5 mm <sup>2</sup>
4 x 2/3 GN	4.3 kW 400 V+3N~50/60 Hz	1 x 250 W	3.9 kW	7.5 A	5 x 1.5 mm <sup>2</sup>
4 x 1/1 GN	5.2 kW 400 V+3N~50/60 Hz	1 x 250 W	4.9 kW	8.5 A	5 x 1.5 mm <sup>2</sup>
7 x 1/1 GN	7.5 kW 400 V+3N~50/60 Hz	1 x 250 W	7.2 kW	12.5 A	5 x 2.5 mm <sup>2</sup>

**2.3A TECHNICAL DATA TABLE FOR THE WATER SYSTEM**

<b>Convection + Humidification</b>			
	<b>304</b> 4 x 2/3 GN	<b>104</b> 4 x 1/1 GN	<b>107</b> 7 x 1/1 GN
Condensation flow rate regulator Optional - Fig. 3.0G	Ø 0.7 mm	Ø 0.7 mm	Ø 0.7 mm
Combined cycle water flow rate regulator. Fig. 2.3	Ø 0.4 mm	Ø 0.4 mm	Ø 0.5 mm

<b>Combi direct</b>			
	<b>304</b> 4 x 2/3 GN	<b>104</b> 4 x 1/1 GN	<b>107</b> 7 x 1/1 GN
Condensation flow rate regulator Fig. 3.0G	Ø 0.7 mm	Ø 0.7 mm	Ø 0.7 mm
Combined and Steam cycles water flow rate regulator. Fig. 2.3	Ø 0.4 mm	Ø 0.4 mm	Ø 0.5 mm