

12/2017


Mod: PV400X-R6

Production code: 19046926




Diamond
catering equipment


Jumbo
002_Cabinets

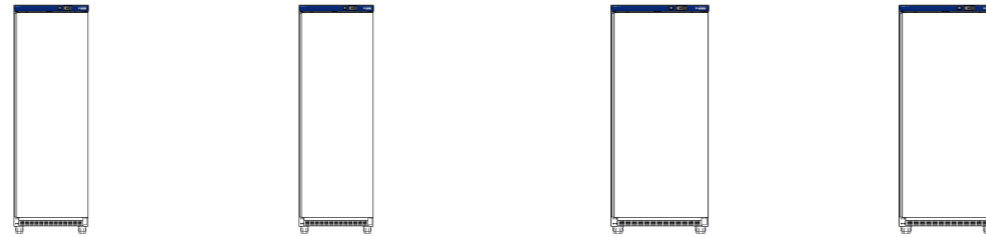

Model	PV400X-R6	N400X-R2	PV600X-R6	N600X-R2
Production Code	19046926	19046927	19046924	19046925
Description				
Range	- 1°C + 6°C.	-22°C -15°C.	- 1°C + 6°C.	-22°C -15°C.
Operating Mode	Ventilated	Static	Ventilated	Static
Gross Capacity [L]	460	460	600	600
External Dimension				
<i>Width</i>	626	626	780	780
<i>Depth / With open dorrs</i>	740/1460	740/1460	740/1460	740/1460
<i>Height</i>	1925	1925	1925	1925
Internal Dimension				
<i>Width</i>	476	506	630	660
<i>Depth</i>	522	569	522	569
<i>Height</i>	1640	1640	1640	1640
Pack Dimension & Weight				
<i>Width</i>	666	666	820	820
<i>Depth</i>	780	780	780	780
<i>Height</i>	1985	1985	1985	1985
<i>Volume [m3]</i>	1,03	1,03	1,27	1,27
<i>Weight</i>	85	90	98	101
N° and type of doors (Reversible)	1, Full	1, Full	1, Full	1, Full
N° and type of grids (included)	3(497x510)/1(497x380)	-	3(651x510)/1(651x380)	-
Internal Light	No	No	No	No
Lock	Yes	Yes	Yes	Yes
Termostat	Carel EASY	Carel EASY	Carel EASY	Carel EASY
Evaporator [n°]	1	1	1	1
Defrost	Yes	Yes Manual	Yes	Yes Manual
<i>Type of defrost</i>	-	-	-	-
<i>N° Defrost in 24 hrs.</i>	4	-	4	-
<i>Evaporation of defrost water</i>	Auto. Temperature	-	Auto. Temperature	-
Compressor				
<i>T° Evaporation [°C]</i>	-10	-25	-10	-25
<i>Model</i>	HMK12AA	EM2X1121U	HMK12AA	EM2X1121U
<i>Power [W]</i>	186	145	186	145
<i>Refrigerant Power [W]</i>	292	199	292	199
Refrigerant				
<i>Type of defrost</i>	R600a	R290	R600a	R290
<i>Refrigerant quantity [gr]</i>	81	82	78	106
Climatic Class	38°C	38°C	38°C	38°C
Total Power [W-A max]	214-1,6	308-3,0	214-1,6	308-3,0
Supply Voltage	230V/50Hz+1	230V/50Hz+1	230V/50Hz+1	230V/50Hz+1
220 / 60Hz Voltage	NO	NO	NO	NO
Noise Level - dbA	45	59	45	59
Net Weight [kg]	81	86	93	96

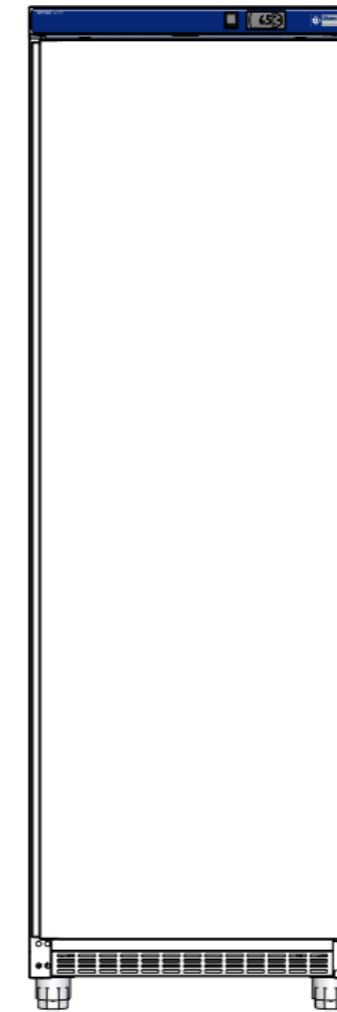

PV400X-R6

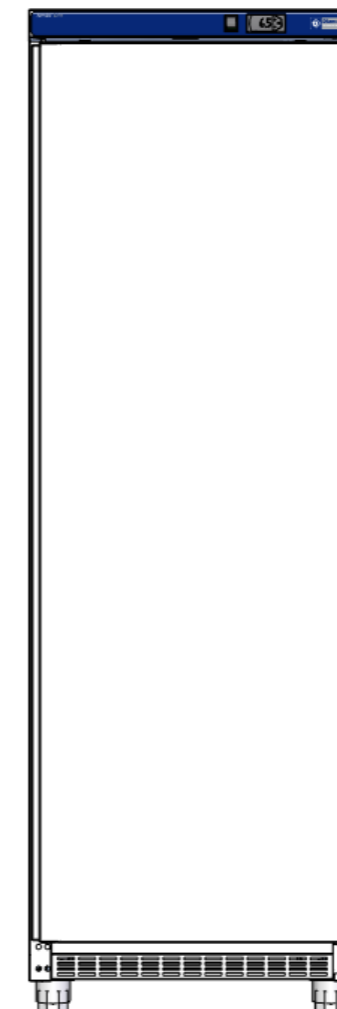

N400X-R2